

Mechanical Seal MS1103

MS1103 offers unbalanced structure of multi-springs and single end face with internal flow and is installed internally.

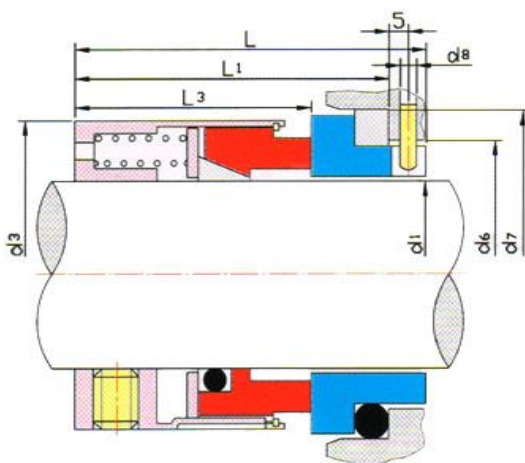
Specifications:

Pressure: $\leq 10\text{bar}$.

Temperature: $-50^{\circ}\text{C} \sim +200^{\circ}\text{C}$.

Linear velocity: $\leq 25\text{m/s}$.

Suitable mediums: water, oil, moderate and low corrosive mediums.

Structure:

MS1103 Dimensions:

Size	d1 h6	d3	d6 H11	d7 H8	d8	L	L1	L3
MS1103-20	20	34	29	35	3	45	37.5	24
MS1103-24	24	38	33	39	3	47	40	26.7
MS1103-25	25	39	34	40	3	47	40	27
MS1103-28	28	42	37	43	3	50	42.5	30
MS1103-30	30	44	39	45	3	50	42.5	30.5
MS1103-33	33	47	42	48	3	50	42.5	30.5
MS1103-35	35	49	44	50	3	50	42.5	30.5
MS1103-38	38	54	49	56	4	52	45	32
MS1103-40	40	56	51	58	4	52	45	32
MS1103-45	45	61	56	63	4	52	45	32
MS1103-50	50	66	62	70	4	55	47.5	34
MS1103-55	55	71	67	75	4	55	47.5	34
MS1103-60	60	80	72	80	4	60	52.5	39
MS1103-65	65	85	77	85	4	60	52.5	39
MS1103-70	70	90	83	92	4	67	60	45.5
MS1103-90	90	114	105	115	4	72	65	50
MS1103-95	95	119	110	120	4	72	65	50