

Mechanical Seal MS1104

MS1104 has unbalanced single-end-face structure with multi-springs, offering a reliable drive for rotating ring. With different friction pairs, the seal can be applied in different working conditions.

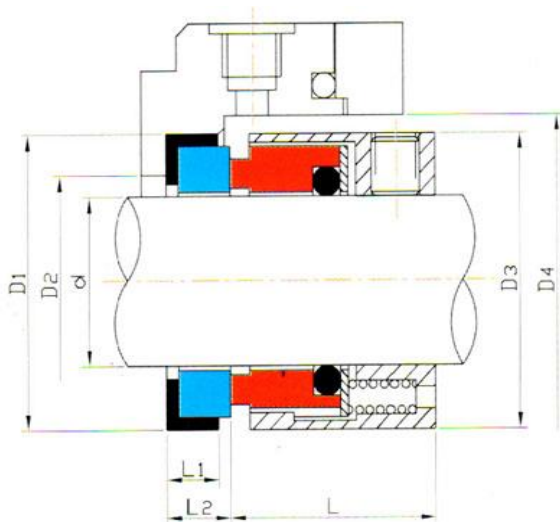
Specifications:

Pressure: $\leq 10\text{bar}$.

Temperature: $-20^{\circ}\text{C} \sim +150^{\circ}\text{C}$.

Linear velocity: $\leq 20\text{m/sec}$.

Suitable mediums: water, oil, acid, alkali, moderate and low corrosive mediums.

Structure:

MS1104 Dimensions:

Size	d h6	D1 H8	D2 H11	D3	D4	L	L1	L2
MS1104-30	30	45	32	45	47	31	7.5	9
MS1104-32	32	48	34	47	49	31	7.5	9
MS1104-33	33	48	35	48	50	31	7.5	9
MS1104-35	35	50	37	50	52	31	7.5	9
MS1104-38	38	56	40	55	58	31	7.5	9
MS1104-45	45	63	47.5	62	65	31	8	9.5
MS1104-50	50	70	52.2	67	70	32.5	8	9.5
MS1104-60	60	80	62.5	81	85	37.5	8	9.5
MS1104-70	70	92	73	91	95	42	9.5	11
MS1104-75	75	97	78	99	104	42	10	12
MS1104-80	80	104	83	104	109	41.8	10	12
MS1104-85	85	109	88	109	114	41.8	10	12
MS1104-90	90	114	93	114	119	46.8	10	12
MS1104-100	100	133.35	103	124	129	47.8	18.5	19